



99 Murray Hill Parkway
East Rutherford, NJ 07073
info@cas-usa.com
www.cas-usa.com

MODEL **CL-5500**

DATE
February 2019

DEALER FAQ


Entering WLAN Information


After the WLAN card has been installed, the network information must be entered into the scale. The network information should be obtained prior to performing the steps outlined in the following instructions.


1.) From the Normal Weigh Mode



2.) Press 

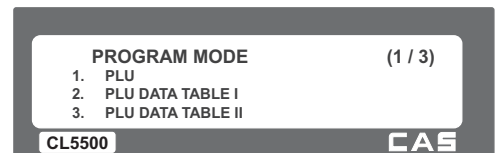


3.) Press  to access the Communications Menu

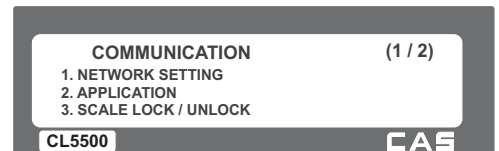


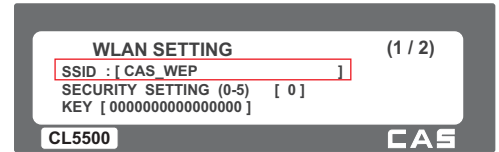
4.) Press  to select Network Setting




5.) Press  to select WLAN Setting

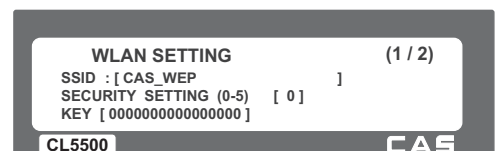


5.) Enter the SSID information then press the  key.





6.) Enter the Encryption type and then press the  key.

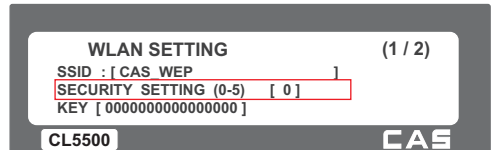


- 0 : No Encryption
- 1 : WEP64
- 2 : WEP128
- 3 : WPA, TKIP
- 4 : WPA2, TKIP
- 5 : WPA2, AES

5.) Enter the Security Key or Password information then press the  key.

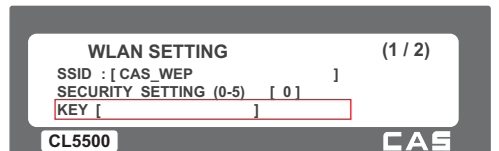

6.) Enter the Operation Mode and then press the  key. The information will be entered in memory.

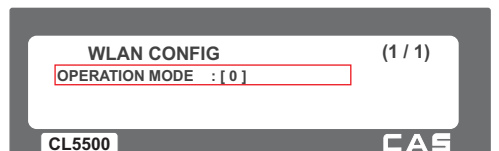

- 0 : Ad-Hoc
- 1 : Infrastructure

Note: This setting is automatically selected for Infrastructure regardless of the number entered.

